

ITP-802GSM

IP67, 8x 10/100Base M12 + 2x 100/1000Base SFP

- ▲ EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4, CE and FCC certified
- ▲ 12/24/48VDC or 110/220VDC redundant dual input power
- ▲ Supports TTDP for train application
- ▲ Build-in 2 bypass GbE UTP ports
- ▲ Cable diagnostics, identifies opens/shorts distance



The ITP series models are managed, industrial grade, L2 Fast Ethernet switches that provide 8x Fast Ethernet UTP plus 2x GbE SFP or 8x Fast Ethernet UTP plus 2x GbE UTP Ports. Housed in rugged wall mountable enclosures, these switches are designed for the harshest environments. All ITP series switches use M12 connectors to ensure water-tight, robust connections and guarantee reliable connections against vibration and shock. These models are also compliant with EN50155, covering power input voltage, surge, EFT, ESD, vibration and shock, making these switches suitable for industrial applications, such as vehicle, rolling stock, or vessel. With an IP67 rating, to protect against dust and water submersion, they are particularly useful in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications, such as IP surveillance or city security.

Features

- M12 and M23 connector against vibration and shock
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (ERPS) for redundant cabling
- Provides up to 5 instances that each supports µ-Ring, µ-Chain or Sub-Ring type for flexible uses.
(Please see CTC Union's µ-Ring white paper for more details)
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports EMS Management

Specifications

| | | |
|----------|-----------------------|--|
| Standard | IEEE 802.3 | 10Base-T 10Mbit/s Ethernet |
| | IEEE 802.3u | 100Base-TX, 100Base-FX, Fast Ethernet |
| | IEEE 802.3ab | 1000Base-T Gbit/s Ethernet over twisted pair |
| | IEEE 802.3z | 1000Base-X Gbit/s Ethernet over Fiber-Optic |
| | IEEE 802.1d | STP (Spanning Tree Protocol) |
| | IEEE 802.1w | RSTP (Rapid Spanning Tree Protocol) |
| | IEEE 802.1s | MSTP (Multiple Spanning Tree Protocol) |
| | ITU-T G.8032 / Y.1344 | ERPS (Ethernet Ring Protection Switching) |
| | ITU-T G.8031 / Y.1342 | EPS (Ethernet Protection Switching) |
| | IEEE 802.1Q | Virtual LANs (VLAN) |
| | IEEE 802.1X | Port based and MAC based Network Access Control, Authentication |
| | IEEE 802.3ac | Max frame size extended to 1522Bytes |
| | IEEE 802.3ad | Link aggregation for parallel links with LACP(Link Aggregation Control Protocol) |
| | IEEE 802.3x | Flow control for Full Duplex |
| | IEEE 802.1ad | Stacked VLANs, Q-in-Q |
| | IEEE 802.1p | LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization |
| | IEEE 802.1ab | Link Layer Discovery Protocol (LLDP) |
| | IEEE 802.3az | EEE (Energy Efficient Ethernet) |

EN50155 Managed Switch

| VLAN ID | 4094 IEEE802.1Q VLAN VID | | | | | | | | |
|-----------------------------|--|---------------|---------------|-------|------|-------|------|-------|------|
| Switch Architecture | Back-plane (Switching Fabric): 5.6Gbps (Full wire-speed) | | | | | | | | |
| Data Processing | Store and Forward | | | | | | | | |
| Flow Control | IEEE 802.3x for full duplex mode Back pressure for half duplex mode | | | | | | | | |
| Network Connector | 8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 2x 100/1000Base-X SFP UTP port provides Auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function 2x Water-proof cable connector, 2x 100/1000Base-X SFP slot, support DDMI | | | | | | | | |
| Console | RS-232 (5-pin A-Code M12 male) | | | | | | | | |
| Network Cable | UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter) | | | | | | | | |
| Protocols | CSMA/CD | | | | | | | | |
| Reverse Polarity Protection | Supported | | | | | | | | |
| Overload Current Protection | Supported | | | | | | | | |
| CPU Watch Dog | Supported | | | | | | | | |
| LED | System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber) UTP: 10/100 Link/Active (Green) SFP Slot: Link/Active (Green) | | | | | | | | |
| Jumbo Frame | 9.6KB | | | | | | | | |
| MAC Address Table | 8K | | | | | | | | |
| Memory Buffer | 512K Bytes for packet buffer | | | | | | | | |
| Device Memory | 16M Bytes Flash ROM, 128M Bytes RAM | | | | | | | | |
| Power Supply | Provides 1x M23 (5-Pin, male) for redundant dual input, optional Low (L) Low voltage (L) : 12/24/48V (8.4~60VDC) | | | | | | | | |
| Power Consumption | <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>ITP-G802TM-LL</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>6.9W</td> </tr> <tr> <td>24VDC</td> <td>8.3W</td> </tr> <tr> <td>48VDC</td> <td>9.8W</td> </tr> </tbody> </table> | Input Voltage | ITP-G802TM-LL | 12VDC | 6.9W | 24VDC | 8.3W | 48VDC | 9.8W |
| Input Voltage | ITP-G802TM-LL | | | | | | | | |
| 12VDC | 6.9W | | | | | | | | |
| 24VDC | 8.3W | | | | | | | | |
| 48VDC | 9.8W | | | | | | | | |
| Warning Message | System Syslog, SMTP/ e-mail event message, alarm relay | | | | | | | | |
| Alarm Relay Contact | 5-pin A-code M12 male, Relay outputs with current carrying capacity of 1 A @24VDC | | | | | | | | |
| Operating Temperature | -40 ~ 75°C | | | | | | | | |
| Operating Humidity | 5% to 95% (Non-condensing) | | | | | | | | |
| Storage Temperature | -40 ~ 85°C | | | | | | | | |
| Housing | Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil | | | | | | | | |
| Dimensions | 69 x 240 x 168mm (D x W x H) | | | | | | | | |
| Weight | 2.645kg | | | | | | | | |
| Installation Mounting | Wall mounting, or DIN Rail mounting (Optional) | | | | | | | | |
| MTBF | 443,868 Hours (MIL-HDBK-217) | | | | | | | | |
| Warranty | 5 years | | | | | | | | |

Certification

| | |
|---|-----------------------------------|
| EMC | CE |
| EMI (Electromagnetic Interference) | FCC Part 15 Subpart B Class A, CE |
| Railway Traffic | EN50155, EN50121-4 |
| Fire protection of railway vehicles | EN45545-2 |
| Immunity for Heavy Industrial Environment | EN61000-6-2 |
| Emission for Heavy Industrial Environment | EN61000-6-4 |

| | |
|--|---|
| EMS (Electromagnetic Susceptibility) Protection Level | EN61000-4-2 (ESD) Level 3, Criteria B |
| | EN61000-4-3 (RS) Level 3, Criteria A |
| | EN61000-4-4 (Burst) Level 3, Criteria A |
| | EN61000-4-5 (Surge) Level 3, Criteria B |
| | EN61000-4-6 (CS) Level 3, Criteria A |
| | EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A |
| Shock | IEC-61373 |
| Freefall | IEC 60068-2-32 |
| Vibration | IEC-61373 |

Software Specifications

Topology

| | |
|--|---|
| VLAN | IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID |
| | IEEE 802.1q VLAN, up to 4094 Groups |
| | IEEE 802.1ad Q-in-Q |
| | MAC-based VLAN, up to 256 entries |
| | IP Subnet-based VLAN, up to 128 entries |
| | Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries |
| | VLAN Translation, up to 256 entries |
| | Private VLAN for port isolation |
| | GVRP (GARP VLAN Registration Protocol) |
| | MVR (Multicast VLAN Registration) |
| Link Aggregation (Port Trunk) | Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group |
| | Dynamic (IEEE 802.3ad LACP), up to 5 trunk group |
| Spanning Tree | IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP |
| Multiple u-Ring | Up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. |
| | Recovery time <10ms |
| | The maximum number of devices allowed in a Ring supported ring is 250. |
| Loop Protection | Supported |
| ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection) | Recovery time <50ms |
| | Single Ring, Sub-Ring, Multiple ring topology network |
| ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching) | Supported |

QoS Feature

| | |
|-------------------------------|---|
| Class of Service | IEEE 802.1p 8 active priorities queues per port |
| Traffic Classification QoS | IEEE 802.1p based CoS |
| | IP Precedence based CoS |
| | IP DSCP based CoS |
| | QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI |
| | QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number |
| Bandwidth Control for Ingress | 100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" |
| Bandwidth Control for Egress | 100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" |
| | Rate Unit : bit Per queue / Per port shaper |
| DiffServ (RF 2474) Remarking | |
| Storm Control | for Unicast, Broadcast, Multicast |

IP Multicasting Feature

| | |
|---------------------|--|
| IGMP / MLD Snooping | IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 |
| | Port Filtering Profile, Throttling |
| | Fast Leave |
| | Maximum Multicast Group : up to 1022 entries |
| | Query / Static Router Port |

Security Features

| | |
|---------------------------------------|--|
| IEEE 802.1X | Port-Based, MAC-Based |
| ACL | Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP |
| RADIUS | Authentication & Accounting |
| TACACS+ | Authentication |
| HTTPS, HTTP | Supported |
| SSL / SSH v2 | Supported |
| User Name Password Authentication | Local Authentication Remote Authentication (via RADIUS / TACACS+) |
| Management Interface Access Filtering | Web, Telnet / SSH, CLI RS-232 console |

Management Features

| | |
|----------------------------|---|
| CLI | Cisco® like CLI |
| Web UI | Supported |
| Telnet | Server |
| SNMP | TFTP, HTTP |
| sFlow | Supported |
| Modbus/TCP | Supports for management and monitoring |
| SW & Configuration Upgrade | TFTP, HTTP Redundant firmware in case of upgrade failure |
| FTP client | Supports for upload/download configuration |
| RMON | RMON I (1, 2, 3, 9 group), RMON II |
| MIB II | RFC 1213 |
| UPnP | Supported |
| BOOTP | Supported |
| DHCP | Server, Client, Relay, Relay option 82 , Snooping |
| RARP | Supported |
| TTDP | Supported (Train Topology Discovery Protocol) |
| IP Source Guard | Supported |
| Port Mirroring | Supported |
| Event Syslog | Syslog server (RFC3164) |
| Warning Message | System syslog, e-mail, alarm relay |
| DNS | Client, Proxy |
| IEEE1588 PTP V2 | Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master and Slave |
| NTP, SNTP | Client |
| LLDP (IEEE 802.1ab) | Link Layer Discovery Protocol LLDP-MED |

IPv6 Features

| | |
|-----------------|-----------------------|
| IPv6 Management | Telnet Server/ICMP v6 |
| SNMP over IPv6 | Supported |
| HTTP over IPv6 | Supported |


EN50155 Managed Switch

| | |
|----------------|---|
| SSH over IPv6 | Supported |
| IPv6 Telnet | Supported |
| IPv6 NTP, Sntp | Client |
| IPv6 TFTP | Supported |
| IPv6 QoS | Supported |
| IPv6 ACL | Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP |

Others Features

| | |
|------------------|---|
| Green Ethernet | Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity |
| Cable Diagnostic | Measuring UTP Cable OK or broken point distance |

Dimensions

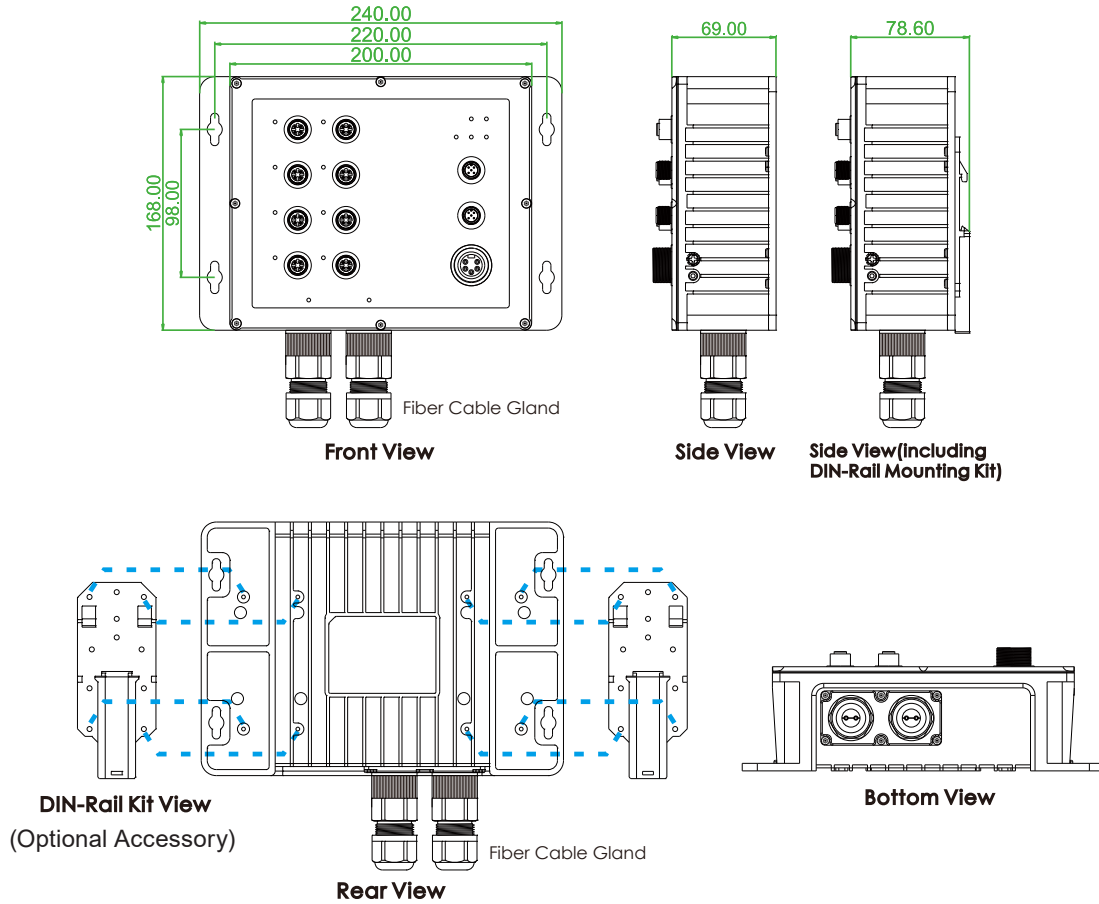

Ordering Information

| Model Name | Managed | IP67 | Total Port | UTP Port M12 | SFP or UTP | Redundant Power Supply | Certification | | | | Operating Temperature |
|----------------|---------|------|------------|-----------------|------------------|----------------------------------|----------------------|-----------|----------------------------|-----------|-----------------------|
| | | | | 10/100M Base-TX | 100/1000M Base-X | Low Volt 12/24/48VDC (8.4~60VDC) | EN50155 EN50121-4 | EN45545-2 | EN61000-6-2 EN61000-6-4 | CE FCC | |
| ITP-802GSM-ELL | V | V | 10 | 8 | 2 SFP | 2 | V | V | V | V | -40~75°C |

Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

| | |
|--------------------|---|
| ISFP-M7000-85-D(E) | Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-S7020-31-D(E) | Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-M5002-31-D(E) | Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-S5030-31-D(E) | Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C) |

Optional Cable/Connector & Din-Rail Kit

P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24 ,IP67, 1 meter



For GbE UTP (A-code model)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24 ,IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire , AWG 22 , IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16) , IP67, 1 meter



For Power

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

P/N: IND-DNK04

Din Rail Kit



(130 X52mm / 4 Screws) (2pcs/set)