


IXR-G4804X

NEW

L3 48x GbE RJ45 + 4x 1G/2.5G/10G SFP+

- ▲ L3 IPV4/IPV6 Static Routing, RIP v1/v2 Dynamic Routing, OSPF v2/v3 Dynamic Routing
- ▲ Supports u-Ring, ERPS, EPS, MSTP, RSTP, STP for redundant cabling
- ▲ Supports maximum up to 14 u-rings in one device
- ▲ EN62368-1, EN50121-4, EN61000-6-2, EN61000-6-4, CE and FCC certified
- ▲ 4KV surge protection for RJ45 and SFP ports
- ▲ Supports negative voltage power input

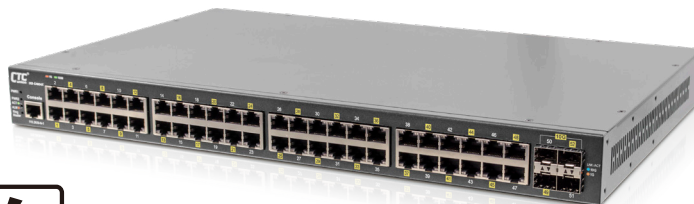

As an industrial Layer 3 Ethernet switch for process and transportation automation applications, IXR-G4804X supports static and dynamic routing protocols, features 4 10G+ SFP slots and 48 Gigabit UTP ports, fanless design and redundancy isolated power supplies, certified to many industry-grade standards, are ideal for deployment in harsh environments to provide mission-critical network services.

Features

- Redundant isolated 24/48/-48VDC (18~60VDC), or/and isolated 110/220VAC power inputs
- Supports negative voltage power input
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power
- STP, RSTPs G.8031 EPS, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for network redundancy
- Provides 14 instances each can support μ-Ring, u-Chain or Sub-Ring for flexible networking applications
- μ-Ring redundancy, recovery time <20ms in 250 devices
- Supports EMS Management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3ae	10 Gbit/s Ethernet over fiber
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3X	Flow control for full duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)

Industrial Layer 3 10G Switch

VLAN ID	4094 IEEE 802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 176Gbp (Full wire-speed)
Data Processing	Store and Forward
Network Connector	10GbE SFP+ : 4x 1G/2.5G/10G SFP+ socket, Supports DDMI RJ45: 48x 10/100/1000Base-T RJ-45, Support Auto negotiation speed, Auto MDI/MDI-X function
Console	RS-232 (RJ-45)
Network Cable	UTP/STP Cat.5e cable or above EIA/TIA-568 100-ohm (100meter)
Protocols	CSMA/CD
Reverse Polarity	Protection for input power
Overload Current	Protection Supported
Power Supply	Redundant 2x AC input power (-AA model) Redundant 1x AC and 1x DC input power (-AD model) Redundant 2x DC input power (-DD model) AC input power (A) : Isolated 110/220VAC (85VAC~264VAC) DC input power (D) : Isolated 24/48/-48VDC (18~60VDC), Removable Terminal Block Supports negative voltage power input
Power Consumption	<52W
LED	System: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Amber), Ring Master (Green) P1~48 UTP: 10/100 Link/Active (Green), 1000 Link/Active (Amber) P49~52 SFP+ Slot: Link/Active (Amber), 10GBase-X Link/Active (Blue)
Jumbo Frame	10K Byte
MAC Address Table	32K
Memory Buffer	4M Bytes for packet buffer
Device Memory	128M Bytes Flash ROM, 2G Bytes RAM
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC, 2-Pin removable terminal block
Operating Temperature	-40 ~ 60°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	280x 440 x 44mm (D x W x H)
Weight	3.23kg (IXR-G4804X-AA) 3.115kg (IXR-G4804X-AD) 3.0kg (IXR-G4804X-DD)
Installation Mounting	19" rack mount
MTBF	91,012 Hours (IXR-G4804X-AA) 99,582 Hours (IXR-G4804X-AD) 110,547 Hours (IXR-G4804X-DD) (MIL-HDBK-217)
Warranty	5 years

Certification

EMC	CE (EN55032, EN55035)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A

Safety	EN62368-1
Hi Pot Protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV Surge Protection	Supported for RJ45 and SFP ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

L3 Routing

IPv4/v6 Static Routing	Supported
RIP v1/v2 Dynamic Routing	Supported
OSPF v2, OSPF v3 Dynamic Routing	Supported

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
Link Aggregation (Port Trunk)	Static (IEEE 802.3ad LACP), Maximum trunk group : 26group Dynamic (IEEE 802.3ad LACP), Maximum trunk group : 26group Per group up-to 8 port
Spanning Tree	IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
Multiple μ -Ring	Up to 14 instances each support μ -Ring, μ -Chain or Sub-Ring for flexible networking applications Recovery time <20ms The maximum number of device is allowed 250 in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported

QoS Features

Class of Service	IEEE 802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE 802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per port based Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast

IP Multicasting Features

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile
	Throttling, Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port

Security Features

IEEE 802.1X	Port-Based
	MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication, Authorization, Accounting
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI RS-232 console

Management Features


CLI	Cisco® like CLI
Web UI	Supported
Telnet	Server
SNMP	V1, V2c, V3
sFlow	Supported
Modbus/TCP	Support management and monitoring
SW & Configuration Upgrade	SFTP, TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Relay option 82, Snooping
IP Source Guard	Supported
Mirroring	Local and Remote
Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
NTP V4.0, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED

IPv6 Features

IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported

IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SIP, Subnet (32bit) L4 : TCP/UDP
Other Features	Green Ethernet Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables LED Power Management : Adjustment LEDs intensity

Dimensions

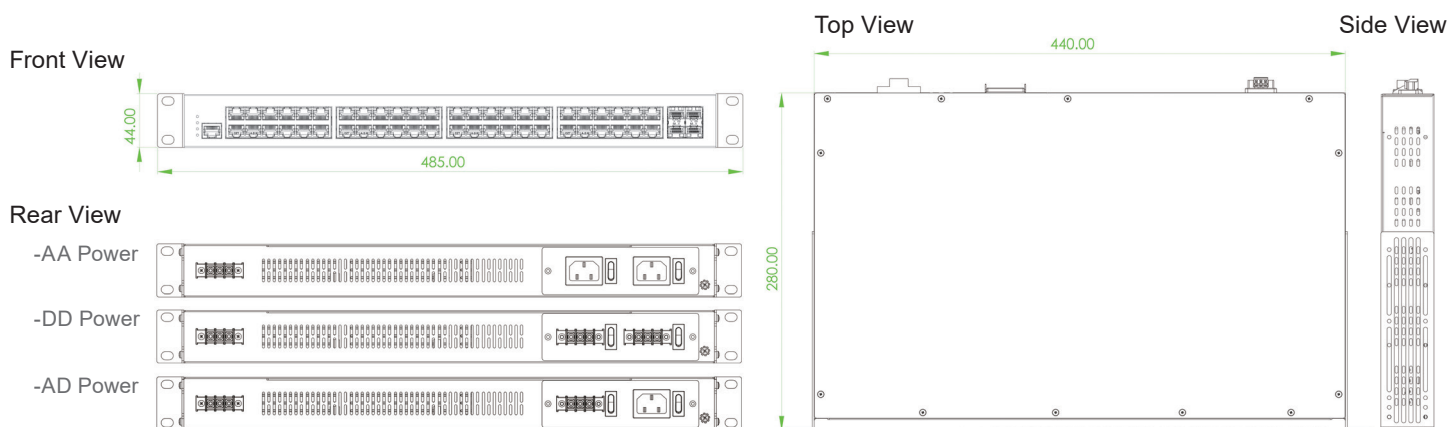

Ordering Information

Model Name	Managed	Total Ports (Maximum)	GbE		10GbE		Input Power		Certification		
			10/100/1000 Base-T(X) RJ45	1G/2.5G/10G SFP+	24/48/-48VDC	110/220VAC	Safety EN62368-1	RailWay EN50121-4	EN61000-6-2	EN61000-6-4	CE, FCC
IXR-G4804X-AA	V	52	48	4			2	V	V	V	V
IXR-G4804X-AD	V	52	48	4	1	1		V	V	V	V
IXR-G4804X-DD	V	52	48	4	2			V	V	V	V

Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M9000-85-D(E)	Industrial SFP 10GbE 10GBase-SR, M/M, 300 meter (OM3 fiber), wave length 850nm, DDMI, -10~70°C (-40~85°C)
ISFP-S9010-31-D(E)	Industrial SFP 10GbE 10GBase-LR, S/M, 10km, wave length 1310nm, DDMI, -10~70°C (-40~85°C)
ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

Industrial Power Supply

NDR-120-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 120W, -20 ~ +70°C (For DC type)
------------	---